

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date  
19 February 2004 (19.02.2004)

PCT

(10) International Publication Number  
**WO 2004/015331 A1**


- (51) International Patent Classification?: **F21V 19/00**
- (21) International Application Number:  
**PCT/IB2003/003272**
- (22) International Filing Date: 18 July 2003 (18.07.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
02078263.7 7 August 2002 (07.08.2002) EP
- (71) Applicant (*for all designated States except US*): **KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]**; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **LINSSEN, Petrus, J., A. [NL/NL]**; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **THEELEN, Antonius, N. [NL/NL]**; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (74) Agent: **PET, Robert, J.**; Philips Intellectual Property & Standards, Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declaration under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MW, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.*

*[Continued on next page]*

(54) Title: DEVICE FOR PLACING A LAMP IN A REFLECTOR

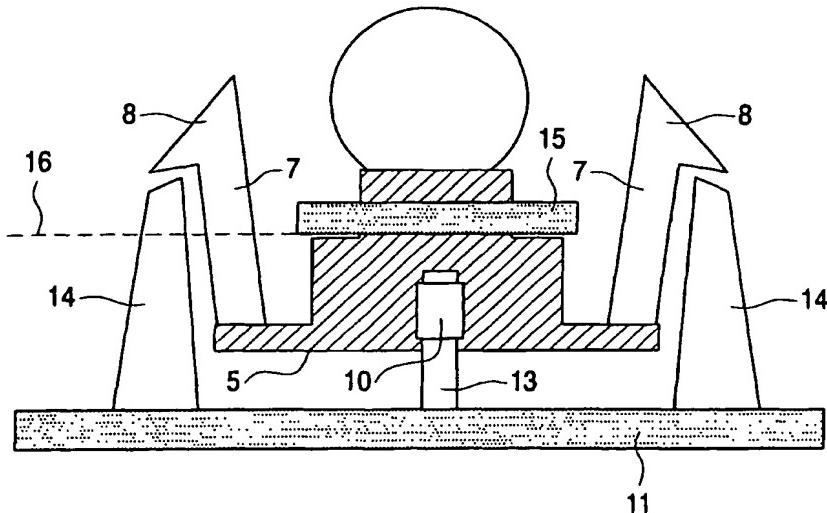

(57) **Abstract:** In a device for placing a lamp in a reflector, a socket (1) for holding a lamp is provided with a main body part (2), with a reference plane (16) to be brought into contact with a reflector surface, with means (3) for holding the lamp at one side of the reference plane, with a resilient annular spring (5) secured to the main body part at the opposite side of the reference plane, and with two upright arms (7) provided with clicks (8), while a back plate (11) is provided with pressure points (14). When securing the back plate to the reflector, the reference plane (16) is brought into contact with said reflector surface, and the pressure points (14), when in contact with the clicks (8) of the socket, displace the clicks (8) in the direction of the reflector over a distance  $\geq x$  so as to put the annular spring (5) under tension, said distance  $\geq x$  being such that the annular spring (5) presses the reference plane towards the said reflector surface with a force of at least 5N, preferably with a force of at least 10 N.

WO 2004/015331 A1